




# Technical Specification


## Starter switch

Pneutron-Part No.: 205 004 03

Fendt No.: G210.902.020.040 ; X830.240.110.000

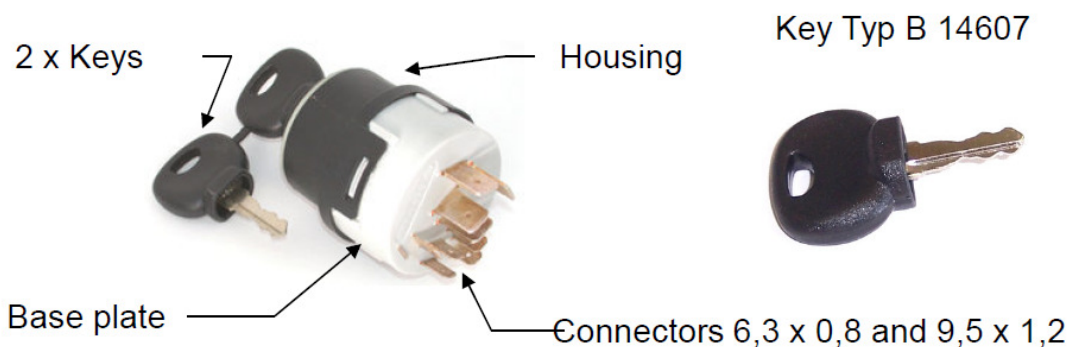

|                               |                     |      |           |            |
|-------------------------------|---------------------|------|-----------|------------|
| - Water protection :          | Lock barrel / Key   |      |           |            |
| - Operating voltage :         | 12 V                | 24 V | Load time |            |
| - Maximal load:               | 30 – 58             | 8 A  | 4 A       | 100 %      |
|                               | 30 – 15/54          | 35 A | 17,5A     | 100 %      |
|                               | 30 – 19             | 70 A | 30 A      | 2 min      |
|                               | 30 – 17             | 70 A | 30 A      | 1 min      |
|                               | 30 – 50a            | 70 A | 40 A      | short-time |
|                               | 30 – 50a            | 18 A | 5 A       | 1 min      |
| - Number of circuit :         | 50.000 – mechanical |      |           |            |
| - Start retry barrier :       | No                  |      |           |            |
| - Pre glow function :         | Yes                 |      |           |            |
| - Environmental temperature : | +85°C/- 40°C        |      |           |            |
| - Number of pins :            | 10                  |      |           |            |

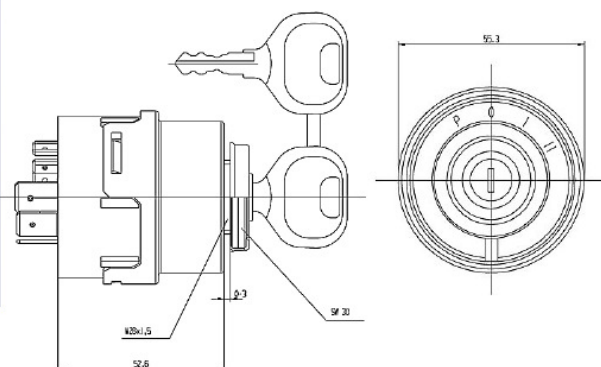

Circuit diagram

|             | 0 | I | II | III |
|-------------|---|---|----|-----|
| 30 --58     |   |   |    |     |
| 30 -- 15/54 |   |   |    |     |
| 30 --19     |   |   |    |     |
| 30 --17     |   |   |    |     |
| 30 --50a    |   |   |    |     |