


nannidiesel

energy in blue

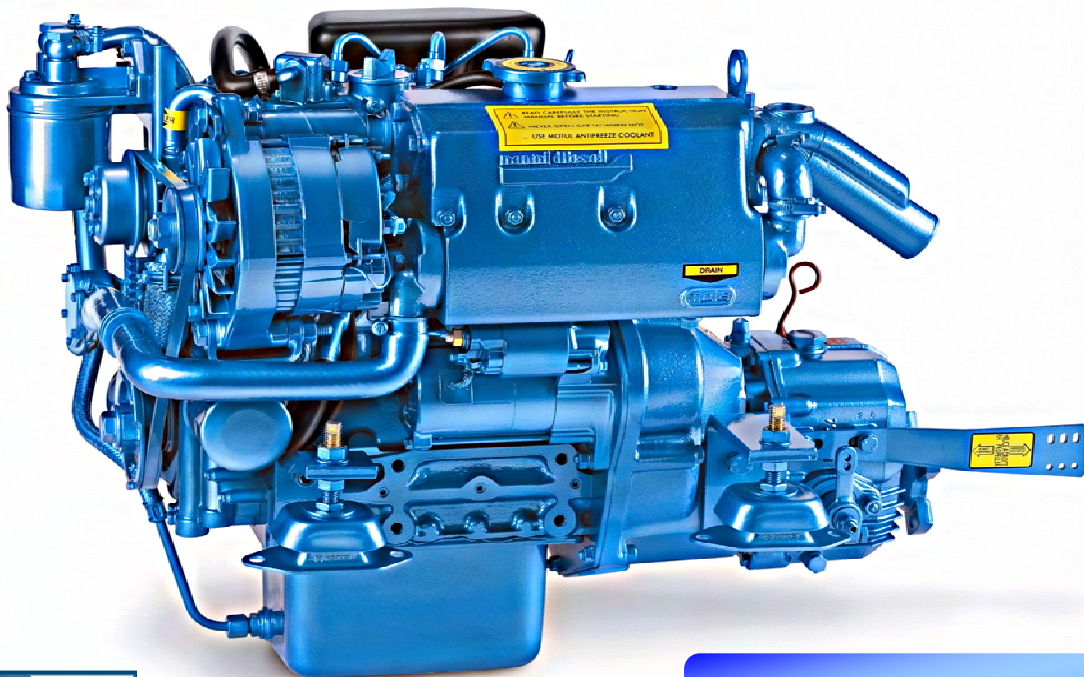

Kubota BASE

3.75 HE


15,4 kW (21 hp)

Technical Specifications

Power: kW (hp)	15,4 kW (21 hp)
Maximum RPM	3600
Displacement: ci (cc)	48.37 (719)
N° of cylinders	3 in line
Bore / Stroke: in (mm)	2.64 x 2,68 (67 x 68)
Compression Ratio	23 / 1
Injection	Indirect (E-TVCS)
Intake	Atmospherical
Cooling System	Heath Exchanger
Alternator	12 V 60 A
Instrument Panel	A 3
Transmission	Mechanical
Weight (incl trans): lb (kg)	231.4 (105)

Hose Diameters

Exhaust: in (mm)	1.57 (40)
Fuel: in (mm)	0,31 (8)
Sea Water: in (mm)	0.79 (20)
Engine Max Install. Angle	15°

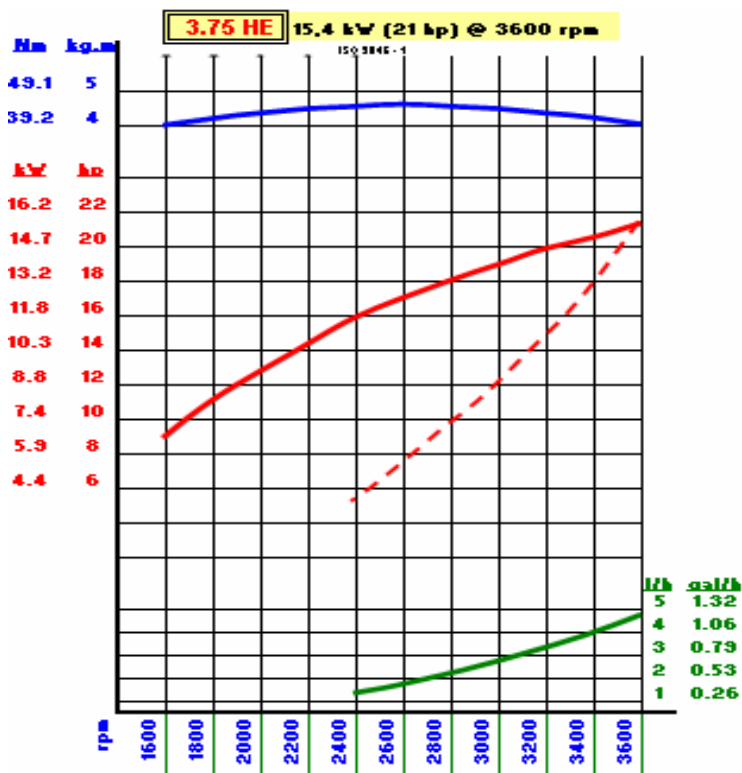

NANNI DIESEL recommends




3.75 HE

Kubota BASE

Line drawings

3.75 HE / TMC 40

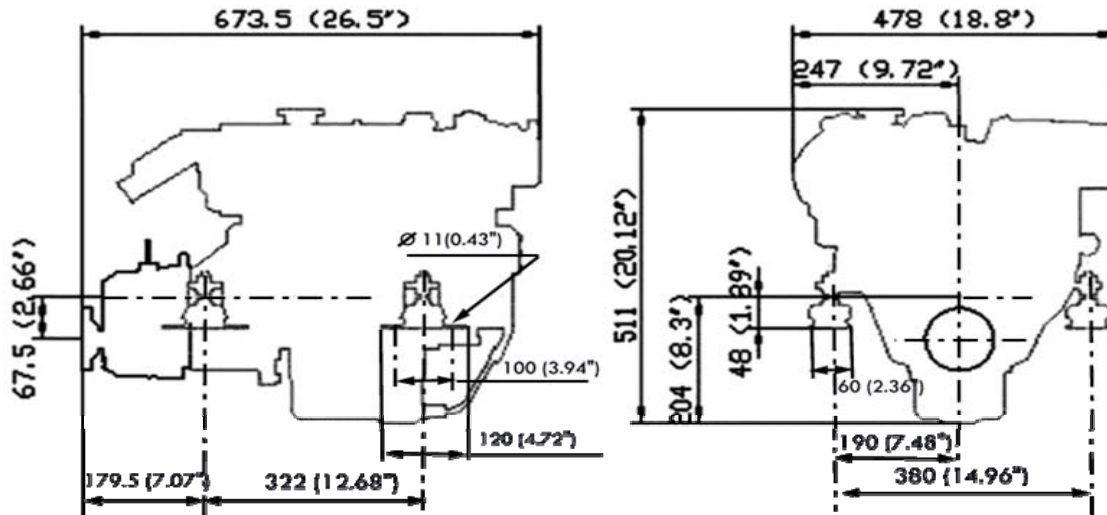

Standard Equipment

- A 3 Instrument Panel
 - _ Tachometer / hourmeter
 - _ Oil Pressure Warning Light & Audio Alarm
 - _ Water T° Warning Light & Audio Alarm
 - _ Battery Charge
 - _ Glow Plugs
 - _ Starter Key
- Mechanical Transmission
- Prearrangemt for cable use
- Egin Mounts
- Owners Manual
- Warranty Certificate
- Electrical Harness 13' (4m)



- Heath Exchanger
- Fresh Water Pump
- Thermostat
- Sea Water Pump
- Fresh Water Cooled Exhaust Manifold
- Exhaust Manifold With Water Injection
- In Line Injection Pump
- Fuel Pump
- Fuel Filter
- Oil Filter
- Electrical Wiring 12 V
- Oil Drain Pump
- Electrical Stop

Optional

- Bipolar Electrical Wiring
- Power Take-Off
- Coupling
- Propeller shaft
 - Exhaust System
 - Remote Control
- Sea Water Hoses
- Fuel Hoses
- Sea Water Filter
- Keel Cooling
- B 3 Instrument Panel